


Produits > Instrumentation > Raccords double bague > Doubles bagues Hy-Lok > Union X JIC

AN Passe Cloison Union

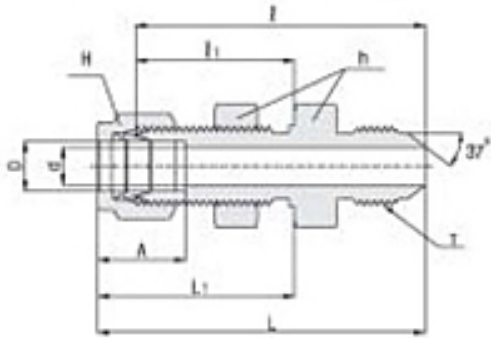

Référence	Tube O.D. (D)	AN Tube Flare Size	Dimension A	Dimension L	Dimension I	Dimension I ₁	Dimension L ₁	Max. Panel Thickness	Min. d	Panel Hole Drill Size	Straight Thread T (U)
CBFU 4-4-S316	1/4 in 6.35 mm	1/4 in 6.35 mm	15.24 mm	53.84 mm	46.48 mm	26.16 mm	33.52 mm	10.16 mm	4.31 mm	11.5 mm	7/16-20 in
CBFU 6-6-S316	3/8 in 9.52 mm	3/8 in 9.52 mm	16.76 mm	57.15 mm	49.78 mm	29.46 mm	36.83 mm	11.17 mm	7.11 mm	14.68 mm	9/16-18 in
CBFU 8-8-S316	1/2 in 12.7 mm	1/2 in 12.70 mm	22.86 mm	65.78 mm	55.62 mm	31.75 mm	41.91 mm	12.7 mm	9.90 mm	19.44 mm	3/4-16 in
CBFU 12-12-S316	3/4 in 19.05 mm	3/4 in 19.06 mm	24.38 mm	78.99 mm	68.83 mm	37.33 mm	47.49 mm	16.76 mm	15.49 mm	25.79 mm	1 1/16-12 in
CBFU 16-16-S316	1 in 25.4 mm	1 in 25.40 mm	31.24 mm	92.45 mm	80.26 mm	45.21 mm	57.40 mm	19.05 mm	21.33 mm	33.73 mm	1 5/16-12 in