


Produits > Instrumentation > Raccords double bague > Doubles bagues Hy-Lok > Adaptateur pour tube

## Adaptateur Mâle

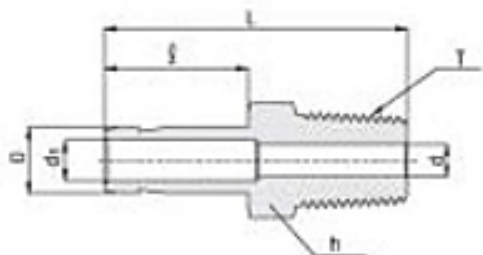

Référence	Tube O.D. (D)	Dimension d <sub>1</sub>	Dimension L	Dimension I	Material	Min. d	T (NPT)	T [R (PT)]	Type
CAM 2-2N-S316	1/8 in 3.17 mm	1.77 mm	29.50 mm	13.45 mm	316 Stainless Steel	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 2-4N-S316	1/8 in 3.17 mm	1.77 mm	34.80 mm	13.45 mm	316 Stainless Steel	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 3-2N-S316	3/16 in 4.76 mm	3.04 mm	30.22 mm	14.20 mm	316 Stainless Steel	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 3-4N-S316	3/16 in 4.76 mm	3.04 mm	35.56 mm	14.20 mm	316 Stainless Steel	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 4-2N-S316	1/4 in 6.35 mm	4.57 mm	31.80 mm	15.75 mm	316 Stainless Steel	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 4-4N-S316	1/4 in 6.35 mm	4.57 mm	37.08 mm	15.75 mm	316 Stainless Steel	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 4-6N-S316	1/4 in 6.35 mm	4.57 mm	37.84 mm	15.75 mm	316 Stainless Steel	10.41 mm	3/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 4-8N-S316	1/4 in 6.35 mm	4.57 mm	43.43 mm	15.75 mm	316 Stainless Steel	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread

Référence	Tube O.D. (D)	Dimension d <sub>1</sub>	Dimension L	Dimension I	Material	Min. d	T (NPT)	T [R (PT)]	Type
CAM 5-2N-S316	5/16 in 7.93 mm	6.35 mm	32.76 mm	16.80 mm	316 Stainless Steel	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 5-4N-S316	5/16 in 7.93 mm	6.35 mm	38.10 mm	16.80 mm	316 Stainless Steel	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 6-2N-S316	3/8 in 9.52 mm	7.11 mm	33.50 mm	17.50 mm	316 Stainless Steel	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 6-4N-S316	3/8 in 9.52 mm	7.11 mm	38.90 mm	17.50 mm	316 Stainless Steel	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 6-6N-S316	3/8 in 9.52 mm	7.11 mm	39.60 mm	17.50 mm	316 Stainless Steel	10.41 mm	3/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 6-8N-S316	3/8 in 9.52 mm	7.11 mm	45.20 mm	17.50 mm	316 Stainless Steel	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 8-4N-S316	1/2 in 12.7 mm	9.90 mm	44.50 mm	23.20 mm	316 Stainless Steel	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 8-6N-S316	1/2 in 12.7 mm	9.90 mm	45.20 mm	23.20 mm	316 Stainless Steel	10.41 mm	3/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 8-8N-S316	1/2 in 12.7 mm	9.90 mm	50.50 mm	23.20 mm	316 Stainless Steel	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 10-6N-S316	5/8 in 15.87 mm	12.70 mm	47.40 mm	24.70 mm	316 Stainless Steel	10.41 mm	3/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 10-8N-S316	5/8 in 15.87 mm	12.70 mm	52.30 mm	24.70 mm	316 Stainless Steel	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 10-12N-S316	5/8 in 15.87 mm	12.70 mm	52.30 mm	24.70 mm	316 Stainless Steel	18.28 mm	3/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 12-8N-S316	3/4 in 19.05 mm	14.98 mm	52.30 mm	24.70 mm	316 Stainless Steel	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 12-12N-S316	3/4 in 19.05 mm	14.98 mm	52.30 mm	24.70 mm	316 Stainless Steel	18.28 mm	3/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 12-16N-S316	3/4 in 19.05 mm	14.98 mm	57.91 mm	24.70 mm	316 Stainless Steel	22.35 mm	1 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 14-12N-S316	7/8 in 22.22 mm	17.27 mm	54.30 mm	26.7 mm	316 Stainless Steel	18.28 mm	3/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 16-12N-S316	1 in 25.4 mm	20.06 mm	58.70 mm	31.70 mm	316 Stainless Steel	18.28 mm	3/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread

Référence	Tube O.D. (D)	Dimension d <sub>1</sub>	Dimension L	Dimension I	Material	Min. d	T (NPT)	T [R (PT)]	Type
CAM 16-16N-S316	1 in 25.4 mm	20.06 mm	66.00 mm	31.70 mm	316 Stainless Steel	22.35 mm	1 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 20-20N-S316	1 1/4 in 31.75 mm	N/A	80.26 mm	40 mm	316 Stainless Steel	27.68 mm	1 1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 24-24N-S316	1 1/2 in 38.10 mm	N/A	94.48 mm	51.50 mm	316 Stainless Steel	33.27 mm	1 1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 32-32N-S316	2 in 50.80 mm	N/A	119.38 mm	68.40 mm	316 Stainless Steel	44.45 mm	2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 2M-2R-S316	3 mm	1.8 mm	29.4 mm	13.15 mm	316 Stainless Steel	4.0 mm	N/A	1/8 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 6M-2R-S316	6.0 mm	4.6 mm	32.8 mm	15.75 mm	316 Stainless Steel	4.6 mm	N/A	1/8 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 6M-4R-S316	6.0 mm	4.6 mm	38.10 mm	15.75 mm	316 Stainless Steel	4.6 mm	N/A	1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 8M-4R-S316	8.0 mm	6.3 mm	39.1 mm	16.50 mm	316 Stainless Steel	6.3 mm	N/A	1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 10M-4R-S316	10.0 mm	7.7 mm	39.9 mm	17.50 mm	316 Stainless Steel	7.7 mm	N/A	1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 10M-6R-S316	10.0 mm	7.7 mm	40.6 mm	17.50 mm	316 Stainless Steel	7.7 mm	N/A	3/8 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 10M-8R-S316	10.0 mm	7.7 mm	45.2 mm	17.50 mm	316 Stainless Steel	11.9 mm	N/A	1/2 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 12M-4R-S316	12.0 mm	9.1 mm	46.5 mm	23.50 mm	316 Stainless Steel	7.1 mm	N/A	1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 12M-6R-S316	12.0 mm	9.1 mm	46.2 mm	23.50 mm	316 Stainless Steel	9.1 mm	N/A	3/8 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 12M-8R-S316	12.0 mm	9.1 mm	51.8 mm	23.50 mm	316 Stainless Steel	11.9 mm	N/A	1/2 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 18M-8R-S316	18 mm	13.9 mm	53.2 mm	24.90 mm	316 Stainless Steel	11.9 mm	N/A	1/2 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 18M-12R-S316	18 mm	13.9 mm	53.2 mm	24.90 mm	316 Stainless Steel	15.9 mm	N/A	3/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 28M-16R-S316	28 mm	N/A	74.7 mm	31.70 mm	316 Stainless Steel	22.2 mm	N/A	1 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 28M-20R-S316	28 mm	N/A	76.2 mm	31.70 mm	316 Stainless Steel	23.8 mm	N/A	1 1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 32M-20R-S316	32 mm	N/A	61.0 mm	40 mm	316 Stainless Steel	27.4 mm	N/A	1 1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 38M-24R-S316	38 mm	N/A	92.20 mm	51.50 mm	316 Stainless Steel	33.3 mm	N/A	1 1/2 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 2-2N-STEL	1/8 in 3.17 mm	1.77 mm	29.50 mm	13.45 mm	Carbon Steel	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 2-4N-STEL	1/8 in 3.17 mm	1.77 mm	34.80 mm	13.45 mm	Carbon Steel	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 3-2N-STEL	3/16 in 4.76 mm	3.04 mm	30.22 mm	14.20 mm	Carbon Steel	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread

Référence	Tube O.D. (D)	Dimension d <sub>1</sub>	Dimension L	Dimension I	Material	Min. d	T (NPT)	T [R (PT)]	Type
CAM 3-4N-STEL	3/16 in 4.76 mm	3.04 mm	35.56 mm	14.20 mm	Carbon Steel	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 4-2N-STEL	1/4 in 6.35 mm	4.57 mm	31.80 mm	15.75 mm	Carbon Steel	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 4-4N-STEL	1/4 in 6.35 mm	4.57 mm	37.08 mm	15.75 mm	Carbon Steel	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 4-6N-STEL	1/4 in 6.35 mm	4.57 mm	37.84 mm	15.75 mm	Carbon Steel	10.41 mm	3/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 4-8N-STEL	1/4 in 6.35 mm	4.57 mm	43.43 mm	15.75 mm	Carbon Steel	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 5-2N-STEL	5/16 in 7.93 mm	6.35 mm	32.76 mm	16.80 mm	Carbon Steel	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 5-4N-STEL	5/16 in 7.93 mm	6.35 mm	38.10 mm	16.80 mm	Carbon Steel	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 6-2N-STEL	3/8 in 9.52 mm	7.11 mm	33.50 mm	17.50 mm	Carbon Steel	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 6-4N-STEL	3/8 in 9.52 mm	7.11 mm	38.90 mm	17.50 mm	Carbon Steel	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 6-6N-STEL	3/8 in 9.52 mm	7.11 mm	39.60 mm	17.50 mm	Carbon Steel	10.41 mm	3/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 6-8N-STEL	3/8 in 9.52 mm	7.11 mm	45.2 mm	17.50 mm	Carbon Steel	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 8-4N-STEL	1/2 in 12.7 mm	9.90 mm	44.50 mm	23.20 mm	Carbon Steel	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 8-6N-STEL	1/2 in 12.7 mm	9.90 mm	45.2 mm	23.20 mm	Carbon Steel	10.41 mm	3/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 8-8N-STEL	1/2 in 12.7 mm	9.90 mm	50.50 mm	23.20 mm	Carbon Steel	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 10-6N-STEL	5/8 in 15.87 mm	12.70 mm	47.40 mm	24.70 mm	Carbon Steel	10.41 mm	3/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 10-8N-STEL	5/8 in 15.87 mm	12.70 mm	52.30 mm	24.70 mm	Carbon Steel	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 10-12N-STEL	5/8 in 15.87 mm	12.70 mm	52.30 mm	24.70 mm	Carbon Steel	18.28 mm	3/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread

Référence	Tube O.D. (D)	Dimension d <sub>1</sub>	Dimension L	Dimension I	Material	Min. d	T (NPT)	T [R (PT)]	Type
CAM 12-8N-STEL	3/4 in 19.05 mm	14.98 mm	52.30 mm	24.70 mm	Carbon Steel	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 12-12N-STEL	3/4 in 19.05 mm	14.98 mm	52.30 mm	24.70 mm	Carbon Steel	18.28 mm	3/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 12-16N-STEL	3/4 in 19.05 mm	14.98 mm	57.91 mm	24.70 mm	Carbon Steel	22.35 mm	1 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 14-12N-STEL	7/8 in 22.22 mm	17.27 mm	54.30 mm	26.7 mm	Carbon Steel	18.28 mm	3/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 16-12N-STEL	1 in 25.4 mm	20.06 mm	58.70 mm	31.70 mm	Carbon Steel	18.28 mm	3/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 16-16N-STEL	1 in 25.4 mm	20.06 mm	66.00 mm	31.70 mm	Carbon Steel	22.35 mm	1 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 20-20N-STEL	1 1/4 in 31.75 mm	N/A	80.26 mm	40 mm	Carbon Steel	27.68 mm	1 1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 24-24N-STEL	1 1/2 in 38.10 mm	N/A	94.48 mm	51.50 mm	Carbon Steel	33.27 mm	1 1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 32-32N-STEL	2 in 50.80 mm	N/A	119.38 mm	68.40 mm	Carbon Steel	44.45 mm	2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 2M-2R-STEL	3 mm	1.8 mm	29.4 mm	13.15 mm	Carbon Steel	4.0 mm	N/A	1/8 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 6M-2R-STEL	6.0 mm	4.6 mm	32.8 mm	15.75 mm	Carbon Steel	4.6 mm	N/A	1/8 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 6M-4R-STEL	6.0 mm	4.6 mm	38.10 mm	15.75 mm	Carbon Steel	4.6 mm	N/A	1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 8M-4R-STEL	8.0 mm	6.3 mm	39.1 mm	16.50 mm	Carbon Steel	6.3 mm	N/A	1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 10M-4R-STEL	10.0 mm	7.7 mm	39.9 mm	17.50 mm	Carbon Steel	7.7 mm	N/A	1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 10M-6R-STEL	10.0 mm	7.7 mm	40.6 mm	17.50 mm	Carbon Steel	7.7 mm	N/A	3/8 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 10M-8R-STEL	10.0 mm	7.7 mm	45.2 mm	17.50 mm	Carbon Steel	11.9 mm	N/A	1/2 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 12M-4R-STEL	12.0 mm	9.1 mm	46.5 mm	23.50 mm	Carbon Steel	7.1 mm	N/A	1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 12M-6R-STEL	12.0 mm	9.1 mm	46.2 mm	23.50 mm	Carbon Steel	9.1 mm	N/A	3/8 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 12M-8R-STEL	12.0 mm	9.1 mm	51.8 mm	23.50 mm	Carbon Steel	11.9 mm	N/A	1/2 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 18M-8R-STEL	18 mm	13.9 mm	53.2 mm	24.90 mm	Carbon Steel	11.9 mm	N/A	1/2 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 18M-12R-STEL	18 mm	13.9 mm	53.2 mm	24.90 mm	Carbon Steel	15.9 mm	N/A	3/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 28M-16R-STEL	28 mm	N/A	74.7 mm	31.70 mm	Carbon Steel	22.2 mm	N/A	1 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 28M-20R-STEL	28 mm	N/A	76.2 mm	31.70 mm	Carbon Steel	23.8 mm	N/A	1 1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread

Référence	Tube O.D. (D)	Dimension d <sub>1</sub>	Dimension L	Dimension I	Material	Min. d	T (NPT)	T [R (PT)]	Type
CAM 32M-20R-STEL	32 mm	N/A	61.0 mm	40 mm	Carbon Steel	27.4 mm	N/A	1 1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 38M-24R-STEL	38 mm	N/A	92.20 mm	51.50 mm	Carbon Steel	33.3 mm	N/A	1 1/2 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 2-2N-BRAS	1/8 in 3.17 mm	1.77 mm	29.50 mm	13.45 mm	Brass	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 2-4N-BRAS	1/8 in 3.17 mm	1.77 mm	34.80 mm	13.45 mm	Brass	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 3-2N-BRAS	3/16 in 4.76 mm	3.04 mm	30.22 mm	14.20 mm	Brass	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 3-4N-BRAS	3/16 in 4.76 mm	3.04 mm	35.56 mm	14.20 mm	Brass	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 4-2N-BRAS	1/4 in 6.35 mm	4.57 mm	31.80 mm	15.75 mm	Brass	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 4-4N-BRAS	1/4 in 6.35 mm	4.57 mm	37.08 mm	15.75 mm	Brass	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 4-6N-BRAS	1/4 in 6.35 mm	4.57 mm	37.84 mm	15.75 mm	Brass	10.41 mm	3/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 4-8N-BRAS	1/4 in 6.35 mm	4.57 mm	43.43 mm	15.75 mm	Brass	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 5-2N-BRAS	5/16 in 7.93 mm	6.35 mm	32.76 mm	16.80 mm	Brass	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 5-4N-BRAS	5/16 in 7.93 mm	6.35 mm	38.10 mm	16.80 mm	Brass	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 6-2N-BRAS	3/8 in 9.52 mm	7.11 mm	33.50 mm	17.50 mm	Brass	4.57 mm	1/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 6-4N-BRAS	3/8 in 9.52 mm	7.11 mm	38.90 mm	17.50 mm	Brass	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 6-6N-BRAS	3/8 in 9.52 mm	7.11 mm	39.60 mm	17.50 mm	Brass	10.41 mm	3/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 6-8N-BRAS	3/8 in 9.52 mm	7.11 mm	45.2 mm	17.50 mm	Brass	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 8-4N-BRAS	1/2 in 12.7 mm	9.90 mm	44.50 mm	23.20 mm	Brass	7.11 mm	1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 8-6N-BRAS	1/2 in 12.7 mm	9.90 mm	45.2 mm	23.20 mm	Brass	10.41 mm	3/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread

Référence	Tube O.D. (D)	Dimension d <sub>1</sub>	Dimension L	Dimension I	Material	Min. d	T (NPT)	T [R (PT)]	Type
CAM 8-8N-BRAS	1/2 in 12.7 mm	9.90 mm	50.50 mm	23.20 mm	Brass	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 10-6N-BRAS	5/8 in 15.87 mm	12.70 mm	47.40 mm	24.70 mm	Brass	10.41 mm	3/8 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 10-8N-BRAS	5/8 in 15.87 mm	12.70 mm	52.30 mm	24.70 mm	Brass	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 10-12N-BRAS	5/8 in 15.87 mm	12.70 mm	52.30 mm	24.70 mm	Brass	18.28 mm	3/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 12-8N-BRAS	3/4 in 19.05 mm	14.98 mm	52.30 mm	24.70 mm	Brass	12.7 mm	1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 12-12N-BRAS	3/4 in 19.05 mm	14.98 mm	52.30 mm	24.70 mm	Brass	18.28 mm	3/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 12-16N-BRAS	3/4 in 19.05 mm	14.98 mm	57.91 mm	24.70 mm	Brass	22.35 mm	1 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 14-12N-BRAS	7/8 in 22.22 mm	17.27 mm	54.30 mm	26.7 mm	Brass	18.28 mm	3/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 16-12N-BRAS	1 in 25.4 mm	20.06 mm	58.70 mm	31.70 mm	Brass	18.28 mm	3/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 16-16N-BRAS	1 in 25.4 mm	20.06 mm	66.00 mm	31.70 mm	Brass	22.35 mm	1 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 20-20N-BRAS	1 1/4 in 31.75 mm	N/A	80.26 mm	40 mm	Brass	27.68 mm	1 1/4 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 24-24N-BRAS	1 1/2 in 38.10 mm	N/A	94.48 mm	51.50 mm	Brass	33.27 mm	1 1/2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 32-32N-BRAS	2 in 50.80 mm	N/A	119.38 mm	68.40 mm	Brass	44.45 mm	2 in	N/A	Connects Fractional Hy-Lok Port to Female NPT Thread
CAM 2M-2R-BRAS	3 mm	1.8 mm	29.4 mm	13.15 mm	Brass	4.0 mm	N/A	1/8 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 6M-2R-BRAS	6.0 mm	4.6 mm	32.8 mm	15.75 mm	Brass	4.6 mm	N/A	1/8 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 6M-4R-BRAS	6.0 mm	4.6 mm	38.10 mm	15.75 mm	Brass	4.6 mm	N/A	1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 8M-4R-BRAS	8.0 mm	6.3 mm	39.1 mm	16.50 mm	Brass	6.3 mm	N/A	1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 10M-4R-BRAS	10.0 mm	7.7 mm	39.9 mm	17.50 mm	Brass	7.7 mm	N/A	1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 10M-6R-BRAS	10.0 mm	7.7 mm	40.6 mm	17.50 mm	Brass	7.7 mm	N/A	3/8 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 10M-8R-BRAS	10.0 mm	7.7 mm	45.2 mm	17.50 mm	Brass	11.9 mm	N/A	1/2 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread



Référence	Tube O.D. (D)	Dimension d <sub>1</sub>	Dimension L	Dimension I	Material	Min. d	T (NPT)	T [R (PT)]	Type
CAM 12M-4R-BRAS	12.0 mm	9.1 mm	46.5 mm	23.50 mm	Brass	7.1 mm	N/A	1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 12M-6R-BRAS	12.0 mm	9.1 mm	46.2 mm	23.50 mm	Brass	9.1 mm	N/A	3/8 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 12M-8R-BRAS	12.0 mm	9.1 mm	51.8 mm	23.50 mm	Brass	11.9 mm	N/A	1/2 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 18M-8R-BRAS	18 mm	13.9 mm	53.2 mm	24.90 mm	Brass	11.9 mm	N/A	1/2 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 18M-12R-BRAS	18 mm	13.9 mm	53.2 mm	24.90 mm	Brass	15.9 mm	N/A	3/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 28M-16R-BRAS	28 mm	N/A	74.7 mm	31.70 mm	Brass	22.2 mm	N/A	1 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 28M-20R-BRAS	28 mm	N/A	76.2 mm	31.70 mm	Brass	23.8 mm	N/A	1 1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 32M-20R-BRAS	32 mm	N/A	61.0 mm	40 mm	Brass	27.4 mm	N/A	1 1/4 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread
CAM 38M-24R-BRAS	38 mm	N/A	92.20 mm	51.50 mm	Brass	33.3 mm	N/A	1 1/2 in	Connects Metric Hv-Lok Port to Female ISO Tapered Thread