


Produits > Instrumentation > Raccords double bague > Adaptateur

Adaptateur femelle NPT par Mâle Gaz Conique

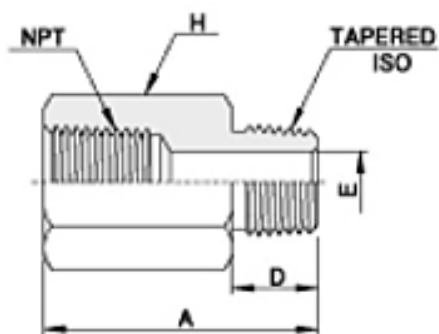

Référence	Dimension A	Dimension D	Dimension E	Dimension H (Hex)	NPT Thread Size	Thread Size BSP/ISO
H-MFAA-2RN-S316	27.4 mm	9.7 mm	4.8 mm	14.2 mm	1/8 in	1/8-28 (7/1) in
H-MFAA-2RN-BRAS	27.4 mm	9.7 mm	4.8 mm	14.2 mm	1/8 in	1/8-28 (7/1) in
H-MFAA-2RN-STEL	27.4 mm	9.7 mm	4.8 mm	14.2 mm	1/8 in	1/8-28 (7/1) in
H-MFAA-4RN-S316	35.8 mm	14.2 mm	7.1 mm	19.05 mm	1/4 in	1/4-19 (7/1) in
H-MFAA-4RN-BRAS	35.8 mm	14.2 mm	7.1 mm	19.05 mm	1/4 in	1/4-19 (7/1) in
H-MFAA-4RN-STEL	35.8 mm	14.2 mm	7.1 mm	19.05 mm	1/4 in	1/4-19 (7/1) in
H-MFAA-6RN-S316	37.6 mm	14.2 mm	9.7 mm	22.2 mm	3/8 in	3/8-19 (7/1) in
H-MFAA-6RN-BRAS	37.6 mm	14.2 mm	9.7 mm	22.2 mm	3/8 in	3/8-19 (7/1) in
H-MFAA-6RN-STEL	37.6 mm	14.2 mm	9.7 mm	22.2 mm	3/8 in	3/8-19 (7/1) in
H-MFAA-8RN-S316	49.0 mm	19.1 mm	11.9 mm	26.9 mm	1/2 in	1/2-14 (7/1) in
H-MFAA-8RN-BRAS	49.0 mm	19.1 mm	11.9 mm	26.9 mm	1/2 in	1/2-14 (7/1) in
H-MFAA-8RN-STEL	49.0 mm	19.1 mm	11.9 mm	26.9 mm	1/2 in	1/2-14 (7/1) in

Référence	Dimension A	Dimension D	Dimension E	Dimension H (Hex)	NPT Thread Size	Thread Size BSP/ISO
H-MFAA-12RN-S316	50.3 mm	19.1 mm	15.7 mm	31.8 mm	3/4 in	3/4-14 (7/1) in
H-MFAA-12RN-BRAS	50.3 mm	19.1 mm	15.7 mm	31.8 mm	3/4 in	3/4-14 (7/1) in
H-MFAA-12RN-STEL	50.3 mm	19.1 mm	15.7 mm	31.8 mm	3/4 in	3/4-14 (7/1) in
H-MFAA-16RN-S316	58.0 mm	23.9 mm	22.3 mm	41.2 mm	1 in	1-11 (7/1) in
H-MFAA-16RN-BRAS	58.0 mm	23.9 mm	22.3 mm	41.2 mm	1 in	1-11 (7/1) in
H-MFAA-16RN-STEL	58.0 mm	23.9 mm	22.3 mm	41.2 mm	1 in	1-11 (7/1) in