








Produits > Hydraulique > Raccords

Coupleurs HP

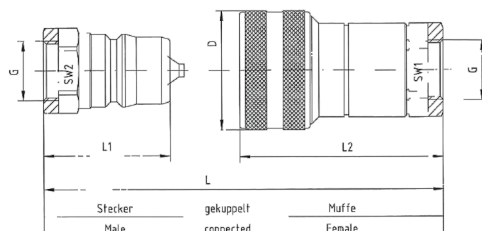

Norme ISO-B

Pression de service PS	Filetage G = BSP	D	L	L1	L2	SW1	SW2	Débit l/min
300	1/8"	23	62.5	31.0	50	15	15	6
300	1/4"	28	74.5	74.5	58	19	19	16
250	3/8"	35	78.5	78.5	64	24	22	30

Pression de service PS	Filetage G = BSP	D	L	L1	L2	SW1	SW2	Débit l/min
250	1/2"	44	91.5	45.5	73	30	27	41
250	3/4"	52	107.0	54.0	86	36	34	92
200	1"	60	126.0	63.0	103	41	41	113
140	1 1/4"	75	198.0	126.0	126	65	65	500
140	1 1/2"	75	199.0	126.0	126	65	65	500
90	2"	105	221.0	142.0	142	90	90	940