


Produits > Instrumentation > Raccords double bague > Adaptateur

Mamelon Mâle NPT par Mâle BSPP

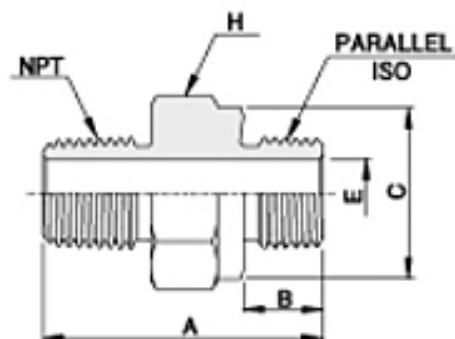

Référence	Dimension A	Dimension B	Dimension C	Dimension E	Dimension H (Hex)	NPT Thread Size	Thread Size BSP/ISO
H-SNA-2NG-S316	27.4 mm	7.1 mm	13.7 mm	4.1 mm	14.2 mm	1/8 in	1/8-28 (228/1) in
H-SNA-2NG-BRAS	27.4 mm	7.1 mm	13.7 mm	4.1 mm	14.2 mm	1/8 in	1/8-28 (228/1) in
H-SNA-2NG-STEL	27.4 mm	7.1 mm	13.7 mm	4.1 mm	14.2 mm	1/8 in	1/8-28 (228/1) in
H-SNA-4NG-S316	36.8 mm	11.2 mm	17.8 mm	5.8 mm	19.05 mm	1/4 in	1/4-19 (228/1) in
H-SNA-4NG-BRAS	36.8 mm	11.2 mm	17.8 mm	5.8 mm	19.05 mm	1/4 in	1/4-19 (228/1) in
H-SNA-4NG-STEL	36.8 mm	11.2 mm	17.8 mm	5.8 mm	19.05 mm	1/4 in	1/4-19 (228/1) in
H-SNA-6NG-S316	37.6 mm	11.2 mm	21.8 mm	7.9 mm	22.2 mm	3/8 in	3/8-19 (228/1) in
H-SNA-6NG-BRAS	37.6 mm	11.2 mm	21.8 mm	7.9 mm	22.2 mm	3/8 in	3/8-19 (228/1) in
H-SNA-6NG-STEL	37.6 mm	11.2 mm	21.8 mm	7.9 mm	22.2 mm	3/8 in	3/8-19 (228/1) in
H-SNA-8NG-S316	45.0 mm	14.2 mm	26.1 mm	11.9 mm	26.9 mm	1/2 in	1/2-14 (228/1) in
H-SNA-8NG-BRAS	45.0 mm	14.2 mm	26.1 mm	11.9 mm	26.9 mm	1/2 in	1/2-14 (228/1) in

Référence	Dimension A	Dimension B	Dimension C	Dimension E	Dimension H (Hex)	NPT Thread Size	Thread Size BSP/ISO
H-SNA-8NG-STEL	45.0 mm	14.2 mm	26.1 mm	11.9 mm	26.9 mm	1/2 in	1/2-14 (228/1) in
H-SNA-12NG-S316	49.0 mm	15.7 mm	31.5 mm	15.7 mm	33.3 mm	3/4 in	3/4-14 (228/1) in
H-SNA-12NG-BRAS	49.0 mm	15.7 mm	31.5 mm	15.7 mm	33.3 mm	3/4 in	3/4-14 (228/1) in
H-SNA-12NG-STEL	49.0 mm	15.7 mm	31.5 mm	15.7 mm	33.3 mm	3/4 in	3/4-14 (228/1) in
H-SNA-16NG-S316	56.9 mm	18.3 mm	38.9 mm	19.8 mm	41.0 mm	1 in	1-11 (228/1) in
H-SNA-16NG-BRAS	56.9 mm	18.3 mm	38.9 mm	19.8 mm	41.0 mm	1 in	1-11 (228/1) in
H-SNA-16NG-STEL	56.9 mm	18.3 mm	38.9 mm	19.8 mm	41.0 mm	1 in	1-11 (228/1) in