


Produits > Instrumentation > Vannes > Boisseaux Sphériques

Série 112 - 2 voies

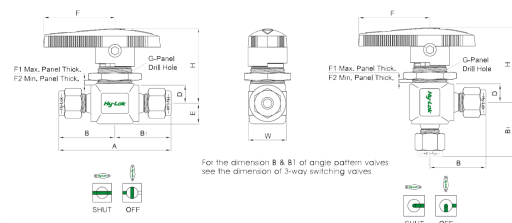

Reference	A	B	B1	D	E	F	F1	F2	G	H	W	End Connection inlet & outlet	Orifice (mm)	Orifice (inch)
B1VH-1T	42.6	21.3	21.3	9.5	8.8	28.0	5.5	2.0	15.0	34.0	19.0	1116 Hy-Lok	1,3	0.052
B1VH-3M	50.8	25.4	25.4	9.5	8.8	28.0	5.5	2.0	15.0	34.0	19.0	3mm Hy-Lok	2,4	0.093
B1VH-2T	50.8	25.4	25.4	9.5	8.8	28.0	5.5	2.0	15.0	34.0	19.0	1/8 Hy-Lok	2,4	0.093
B1VF-2N	41.2	20.6	20.6	9.5	8.8	28.0	5.5	2.0	15.0	34.0	19.0	1/8 FeMale NPT	3,2	0.125
B1VH-6M	55.4	27.7	27.7	9.5	8.8	28.0	5.5	2.0	15.0	34.0	19.0	6mm Hy-Lok	3,2	0.125
B1VH-4T	55.4	27.7	27.7	9.5	8.8	28.0	5.5	2.0	15.0	34.0	19.0	1/4 Hy-Lok	3,2	0.125
B2VF-2N	50.8	25.4	25.4	11.3	10.0	39.0r	6.0	2.5	20.0	41.2	21.0	1/8 Female NPT	4,8	0.187
B2VF-4N	52.4	26.2	26.2	11.3	10.0	39.0r	6.0	2.5	20.0	41.2	21.0	1/4 Female NPT	4,8	0.187
B2VF-4R	52.4	26.2	26.2	11.3	10.0	39.0r	6.0	2.5	20.0	41.2	21.0	1/4 ISO Female Tapered	4,8	0.187
B2VM-4N	50.8	25.4	25.4	11.3	10.0	39.0r	6.0	2.5	20.0	41.2	21.0	1/4 Male NPT	4,8	0.187
B2VMH -4N4T	55.6	25.4	30.2	11.3	10.0	39.0r	6.0	2.5	20.0	41.2	21.0	1/4 MaleNPT / 1/4 Hy-Lok	4,8	0.187

B2VH-6M	60.4	30.2	30.2	11.3	10.0	39.0r	6.0	2.5	20.0	41.2	21.0	6mm Hy-Lok	4,8	0.187
B2VH-4T	60.4	30.2	30.2	11.3	10.0	39.0r	6.0	2.5	20.0	41.2	21.0	1/4 Hy-Lok	4,8	0.187
B2VH-BM	62.0	31.0	31.0	11.3	10.0	39.0r	6.0	2.5	20.0	41.2	21.0	8mm Hy-Lok	4,8	0.187
B2VH-6T	65.0	32.5	32.5	11.3	10.0	39.0r	5.5	2.5	20.0	41.2	21.0	3/8 Hy-Lok	4,8	0.187
B3VF-4N	63.6	31.8	31.8	17.5	14.3	51.0	9.0	3.0	28.0	52.8	33.0	1/4 Female NPT	7,1	0.281
B3VF-6N	63.6	31.8	31.8	17.5	14.3	51.0	9.0	3.0	28.0	52.8	33.0	3/8 Female NPT	7,1	0.281
B3VF-6R	63.6	31.8	31.8	17.5	14.3	51.0	9.0	3.0	28.0	52.8	33.0	3/8 ISO Female Tapered	7,1	0.281
B3VH-6T	77,8	38.9	38.9	17.5	14.3	51.0	9.0	3.0	28.0	52.8	33.0	3/8 Hy-Lok	7,1	0.281
B3VH-10M	77,8	38.9	38.9	17.5	14.3	51.0	9.0	3.0	28.0	52.8	33.0	10mm Hy-Lok	7,1	0.281
B4VF-8N	79.2	39.6	39.6	22.0	17.5	77.0	10.0	3.0	39.0	67.0	41.0	112 Female NPT	7,1	0.281
B4VF-BR	79.2	39.6	39.6	22.0	17.5	77.0	10.0	3.0	39.0	67.0	41.0	1/2 ISO Female Tapered	10,3	0.406
B4VH-12M	100.0	50.0	50.0	22.0	17.5	77.0	10.0	3.0	39.0	67.0	41.0	12mn Hy-Lok	10,3	0.406
B4VH-81	100.0	50.0	50.0	22.0	17.5	77.0	10.0	3.0	39.0	67.0	41.0	1/2 Hy-Lok	10,3	0.406
B4VH-12T	100.0	50.0	50.0	22.0	17.5	77.0	10.0	3.0	39.0	67.0	41.0	3/4 Hy-Lok	10,3	0.406