


Produits > Instrumentation > Raccords double bague > Adaptateur

Té Femelle / Mâle / Femelle

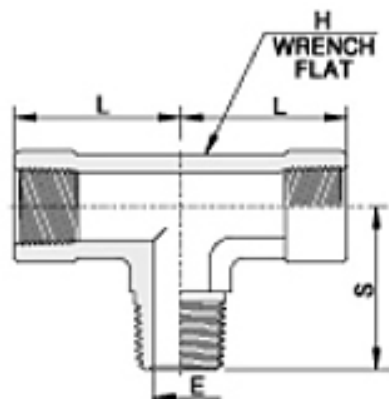

Référence	Dimension E	Dimension L	Dimension S	Pipe Size	Wrench Flat H
H-SBT-2N-S316	4.8 mm	24.0 mm	19.6 mm	1/8 in	12.7 mm
H-SBT-2N-BRAS	4.8 mm	24.0 mm	19.6 mm	1/8 in	12.7 mm
H-SBT-2N-STEL	4.8 mm	24.0 mm	19.6 mm	1/8 in	12.7 mm
H-SBT-4N-S316	7.1 mm	29.0 mm	26.5 mm	1/4 in	17.5 mm
H-SBT-4N-BRAS	7.1 mm	29.0 mm	26.5 mm	1/4 in	17.5 mm
H-SBT-4N-STEL	7.1 mm	29.0 mm	26.5 mm	1/4 in	17.5 mm
H-SBT-6N-S316	9.6 mm	34.5 mm	28.2 mm	3/8 in	20.6 mm
H-SBT-6N-BRAS	9.6 mm	34.5 mm	28.2 mm	3/8 in	20.6 mm
H-SBT-6N-STEL	9.6 mm	34.5 mm	28.2 mm	3/8 in	20.6 mm
H-SBT-8N-S316	11.9 mm	37.0 mm	35.3 mm	1/2 in	25.4 mm
H-SBT-8N-BRAS	11.9 mm	37.0 mm	35.3 mm	1/2 in	25.4 mm

Référence	Dimension E	Dimension L	Dimension S	Pipe Size	Wrench Flat H
H-SBT-8N-STEL	11.9 mm	37.0 mm	35.3 mm	1/2 in	25.4 mm
H-SBT-12N-S316	15.7 mm	46.5 mm	39.6 mm	3/4 in	31.8 mm
H-SBT-12N-BRAS	15.7 mm	46.5 mm	39.6 mm	3/4 in	31.8 mm
H-SBT-12N-STEL	15.7 mm	46.5 mm	39.6 mm	3/4 in	31.8 mm
H-SBT-16N-S316	22.3 mm	48.8 mm	49.2 mm	1 in	42.9 mm
H-SBT-16N-BRAS	22.3 mm	48.8 mm	49.2 mm	1 in	42.9 mm
H-SBT-16N-STEL	22.3 mm	48.8 mm	49.2 mm	1 in	42.9 mm