


Produits > Instrumentation > Raccords double bague > Doubles bagues Hy-Lok > Union Mâle

Union Mâle passe-cloison

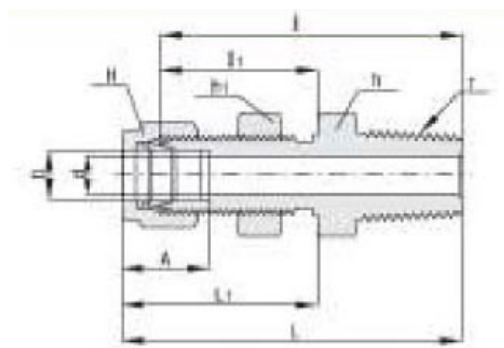

Référence	Tube O.D. (D)	A	L	I	l ₁	L ₁	Material	Max. Panel Thickness	Min. d	Panel Hole Drill Size	T (NPT)
CBMC 2-2N-S316	1/8 in 3.17 mm	12.70 mm	46.48 mm	39.87 mm	24.63 mm	31.24 mm	316 Stainless Steel	12.20	2.28 mm	8.33	1/8 mm
CBMC 4-2N-S316	1/4 in 6.35 mm	15.24 mm	49.53 mm	42.16 mm	26.16 mm	33.52 mm	316 Stainless Steel	10.16	4.82 mm	11.50	1/8 mm
CBMC 4-4N-S316	1/4 in 6.35 mm	15.24 mm	53.34 mm	45.97 mm	26.16 mm	33.52 mm	316 Stainless Steel	10.16	4.82 mm	11.50	1/4 mm
CBMC 6-4N-S316	3/8 in 9.52 mm	16.76 mm	57.4 mm	50.03 mm	29.46 mm	36.83 mm	316 Stainless Steel	11.17	7.11 mm	14.68	1/4 mm
CBMC 6-6N-S316	3/8 in 9.52 mm	16.76 mm	57.4 mm	50.03 mm	29.46 mm	36.83 mm	316 Stainless Steel	11.17	7.11 mm	14.68	3/8 mm
CBMC 6-8N-S316	3/8 in 9.52 mm	16.76 mm	63.75 mm	56.38 mm	29.46 mm	36.83 mm	316 Stainless Steel	11.17	7.11 mm	14.68	1/2 mm
CBMC 8-6N-S316	1/2 in 12.7 mm	22.86 mm	63.24 mm	53.08 mm	31.75 mm	41.91 mm	316 Stainless Steel	12.70	9.39 mm	19.44	3/8 mm
CBMC 8-8N-S316	1/2 in 12.7 mm	22.86 mm	68.83 mm	58.67 mm	31.75 mm	41.91 mm	316 Stainless Steel	12.70	10.41 mm	19.44	1/2 mm

Référence	Tube O.D. (D)	A	L	I	l ₁	L ₁	Material	Max. Panel Thickness	Min. d	Panel Hole Drill Size	T (NPT)
CBMC 12-12N-S316	3/4 in 19.05 mm	24.38 mm	76.2 mm	66.04 mm	37.33 mm	47.49 mm	316 Stainless Steel	16.76	15.74 mm	25.76	3/4 mm
CBMC 16-16N-S316	1 in 25.4 mm	31.24 mm	93.21 mm	81.02 mm	45.21 mm	57.40 mm	316 Stainless Steel	19.05	22.35 mm	33.73	1 mm
CBMC 2-2N-STEL	1/8 in 3.17 mm	12.70 mm	46.48 mm	39.87 mm	24.63 mm	31.24 mm	Carbon Steel	12.20	2.28 mm	8.33	1/8 mm
CBMC 4-2N-STEL	1/4 in 6.35 mm	15.24 mm	49.53 mm	42.16 mm	26.16 mm	33.52 mm	Carbon Steel	10.16	4.82 mm	11.50	1/8 mm
CBMC 4-4N-STEL	1/4 in 6.35 mm	15.24 mm	53.34 mm	45.97 mm	26.16 mm	33.52 mm	Carbon Steel	10.16	4.82 mm	11.50	1/4 mm
CBMC 6-4N-STEL	3/8 in 9.52 mm	16.76 mm	57.4 mm	50.03 mm	29.46 mm	36.83 mm	Carbon Steel	11.17	7.11 mm	14.68	1/4 mm
CBMC 6-6N-STEL	3/8 in 9.52 mm	16.76 mm	57.4 mm	50.03 mm	29.46 mm	36.83 mm	Carbon Steel	11.17	7.11 mm	14.68	3/8 mm
CBMC 6-8N-STEL	3/8 in 9.52 mm	16.76 mm	63.75 mm	56.38 mm	29.46 mm	36.83 mm	Carbon Steel	11.17	7.11 mm	14.68	1/2 mm
CBMC 8-6N-STEL	1/2 in 12.7 mm	22.86 mm	63.24 mm	53.08 mm	31.75 mm	41.91 mm	Carbon Steel	12.70	9.39 mm	19.44	3/8 mm
CBMC 8-8N-STEL	1/2 in 12.7 mm	22.86 mm	68.83 mm	58.67 mm	31.75 mm	41.91 mm	Carbon Steel	12.70	10.41 mm	19.44	1/2 mm
CBMC 12-12N-STEL	3/4 in 19.05 mm	24.38 mm	76.2 mm	66.04 mm	37.33 mm	47.49 mm	Carbon Steel	16.76	15.74 mm	25.76	3/4 mm
CBMC 16-16N-STEL	1 in 25.4 mm	31.24 mm	93.21 mm	81.02 mm	45.21 mm	57.40 mm	Carbon Steel	19.05	22.35 mm	33.73	1 mm
CBMC 2-2N-BRAS	1/8 in 3.17 mm	12.70 mm	46.48 mm	39.87 mm	24.63 mm	31.24 mm	Brass	12.20	2.28 mm	8.33	1/8 mm
CBMC 4-2N-BRAS	1/4 in 6.35 mm	15.24 mm	49.53 mm	42.16 mm	26.16 mm	33.52 mm	Brass	10.16	4.82 mm	11.50	1/8 mm
CBMC 4-4N-BRAS	1/4 in 6.35 mm	15.24 mm	53.34 mm	45.97 mm	26.16 mm	33.52 mm	Brass	10.16	4.82 mm	11.50	1/4 mm
CBMC 6-4N-BRAS	3/8 in 9.52 mm	16.76 mm	57.4 mm	50.03 mm	29.46 mm	36.83 mm	Brass	11.17	7.11 mm	14.68	1/4 mm
CBMC 6-6N-BRAS	3/8 in 9.52 mm	16.76 mm	57.4 mm	50.03 mm	29.46 mm	36.83 mm	Brass	11.17	7.11 mm	14.68	3/8 mm

Référence	Tube O.D. (D)	A	L	I	l ₁	L ₁	Material	Max. Panel Thickness	Min. d	Panel Hole Drill Size	T (NPT)
CBMC 6-8N-BRAS	3/8 in 9.52 mm	16.76 mm	63.75 mm	56.38 mm	29.46 mm	36.83 mm	Brass	11.17	7.11 mm	14.68	1/2 mm
CBMC 8-6N-BRAS	1/2 in 12.7 mm	22.86 mm	63.24 mm	53.08 mm	31.75 mm	41.91 mm	Brass	12.70	9.39 mm	19.44	3/8 mm
CBMC 8-8N-BRAS	1/2 in 12.7 mm	22.86 mm	68.83 mm	58.67 mm	31.75 mm	41.91 mm	Brass	12.70	10.41 mm	19.44	1/2 mm
CBMC 12-12N-BRAS	3/4 in 19.05 mm	24.38 mm	76.2 mm	66.04 mm	37.33 mm	47.49 mm	Brass	16.76	15.74 mm	25.76	3/4 mm
CBMC 16-16N-BRAS	1 in 25.4 mm	31.24 mm	93.21 mm	81.02 mm	45.21 mm	57.40 mm	Brass	19.05	22.35 mm	33.73	1 mm