


Produits > Instrumentation > Raccords double bague > Doubles bagues Hy-Lok > Union femelle

## Union femelle passe-cloison

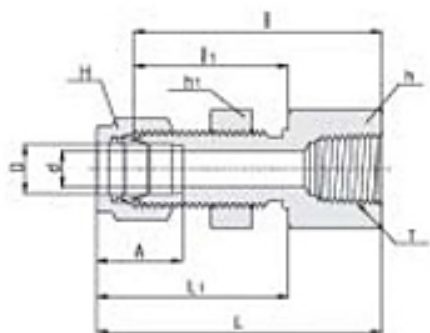

| Référence        | Tube O.D. (D)      | Dimension A | Dimension L | Dimension I | Dimension I <sub>1</sub> | Dimension L <sub>1</sub> | Material            | Min. d   | T (NPT) |
|------------------|--------------------|-------------|-------------|-------------|--------------------------|--------------------------|---------------------|----------|---------|
| CBFC 2-2N-S316   | 1/8 in<br>3.17 mm  | 12.70 mm    | 44.70 mm    | 38.10 mm    | 24.63 mm                 | 31.24 mm                 | 316 Stainless Steel | 2.28 mm  | 1/8 in  |
| CBFC 4-2N-S316   | 1/4 in<br>6.35 mm  | 15.24 mm    | 46.99 mm    | 39.62 mm    | 26.16 mm                 | 33.52 mm                 | 316 Stainless Steel | 4.82 mm  | 1/8 in  |
| CBFC 4-4N-S316   | 1/4 in<br>6.35 mm  | 15.24 mm    | 51.81 mm    | 44.45 mm    | 26.16 mm                 | 33.52 mm                 | 316 Stainless Steel | 4.82 mm  | 1/4 in  |
| CBFC 6-4N-S316   | 3/8 in<br>9.52 mm  | 16.76 mm    | 55.11 mm    | 47.75 mm    | 29.46 mm                 | 36.83 mm                 | 316 Stainless Steel | 7.11 mm  | 1/4 in  |
| CBFC 8-6N-S316   | 1/2 in<br>12.7 mm  | 22.86 mm    | 61.72 mm    | 51.56 mm    | 31.75 mm                 | 41.91 mm                 | 316 Stainless Steel | 10.41 mm | 3/8 in  |
| CBFC 8-8N-S316   | 1/2 in<br>12.7 mm  | 22.86 mm    | 66.54 mm    | 56.38 mm    | 31.75 mm                 | 41.91 mm                 | 316 Stainless Steel | 10.41 mm | 1/2 in  |
| CBFC 12-12N-S316 | 3/4 in<br>19.05 mm | 24.38 mm    | 73.51 mm    | 63.60 mm    | 38.30 mm                 | 47.21 mm                 | 316 Stainless Steel | 15.74 mm | 3/4 in  |
| CBFC 6M-2N-S316  | 6.0 mm             | 15.3 mm     | 46.90 mm    | 39.6 mm     | 27.7 mm                  | 35.00 mm                 | 316 Stainless Steel | 4.8 mm   | 1/8 in  |

| Référence        | Tube O.D. (D)      | Dimension A | Dimension L | Dimension I | Dimension I <sub>1</sub> | Dimension L <sub>1</sub> | Material            | Min. d   | T (NPT) |
|------------------|--------------------|-------------|-------------|-------------|--------------------------|--------------------------|---------------------|----------|---------|
| CBFC 6M-4N-S316  | 6.0 mm             | 15.3 mm     | 51.8 mm     | 44.4 mm     | 26.2 mm                  | 33.6 mm                  | 316 Stainless Steel | 4.8 mm   | 1/4 in  |
| CBFC 8M-4N-S316  | 8.0 mm             | 16.2 mm     | 53.85 mm    | 46.7 mm     | 28.4 mm                  | 35.55 mm                 | 316 Stainless Steel | 6.3 mm   | 1/4 in  |
| CBFC 12M-8N-S316 | 12.0 mm            | 22.8 mm     | 66.50 mm    | 56.4 mm     | 31.8 mm                  | 41.9 mm                  | 316 Stainless Steel | 9.5 mm   | 1/2 in  |
| CBFC 2-2N-STEL   | 1/8 in<br>3.17 mm  | 12.70 mm    | 44.70 mm    | 38.10 mm    | 24.63 mm                 | 31.24 mm                 | Carbon Steel        | 2.28 mm  | 1/8 in  |
| CBFC 4-2N-STEL   | 1/4 in<br>6.35 mm  | 15.24 mm    | 46.99 mm    | 39.62 mm    | 26.16 mm                 | 33.52 mm                 | Carbon Steel        | 4.82 mm  | 1/8 in  |
| CBFC 4-4N-STEL   | 1/4 in<br>6.35 mm  | 15.24 mm    | 51.81 mm    | 44.45 mm    | 26.16 mm                 | 33.52 mm                 | Carbon Steel        | 4.82 mm  | 1/4 in  |
| CBFC 6-4N-STEL   | 3/8 in<br>9.52 mm  | 16.76 mm    | 55.11 mm    | 47.75 mm    | 29.46 mm                 | 36.83 mm                 | Carbon Steel        | 7.11 mm  | 1/4 in  |
| CBFC 8-6N-STEL   | 1/2 in<br>12.7 mm  | 22.86 mm    | 61.72 mm    | 51.56 mm    | 31.75 mm                 | 41.91 mm                 | Carbon Steel        | 10.41 mm | 3/8 in  |
| CBFC 8-8N-STEL   | 1/2 in<br>12.7 mm  | 22.86 mm    | 66.54 mm    | 56.38 mm    | 31.75 mm                 | 41.91 mm                 | Carbon Steel        | 10.41 mm | 1/2 in  |
| CBFC 12-12N-STEL | 3/4 in<br>19.05 mm | 24.38 mm    | 73.51 mm    | 63.60 mm    | 38.30 mm                 | 47.21 mm                 | Carbon Steel        | 15.74 mm | 3/4 in  |
| CBFC 6M-2N-STEL  | 6.0 mm             | 15.3 mm     | 46.90 mm    | 39.6 mm     | 27.7 mm                  | 35.00 mm                 | Carbon Steel        | 4.8 mm   | 1/8 in  |
| CBFC 6M-4N-STEL  | 6.0 mm             | 15.3 mm     | 51.8 mm     | 44.4 mm     | 26.2 mm                  | 33.6 mm                  | Carbon Steel        | 4.8 mm   | 1/4 in  |
| CBFC 8M-4N-STEL  | 8.0 mm             | 16.2 mm     | 53.85 mm    | 46.7 mm     | 28.4 mm                  | 35.55 mm                 | Carbon Steel        | 6.3 mm   | 1/4 in  |
| CBFC 12M-8N-STEL | 12.0 mm            | 22.8 mm     | 66.50 mm    | 56.4 mm     | 31.8 mm                  | 41.9 mm                  | Carbon Steel        | 9.5 mm   | 1/2 in  |
| CBFC 2-2N-BRAS   | 1/8 in<br>3.17 mm  | 12.70 mm    | 44.70 mm    | 38.10 mm    | 24.63 mm                 | 31.24 mm                 | Brass               | 2.28 mm  | 1/8 in  |
| CBFC 4-2N-BRAS   | 1/4 in<br>6.35 mm  | 15.24 mm    | 46.99 mm    | 39.62 mm    | 26.16 mm                 | 33.52 mm                 | Brass               | 4.82 mm  | 1/8 in  |
| CBFC 4-4N-BRAS   | 1/4 in<br>6.35 mm  | 15.24 mm    | 51.81 mm    | 44.45 mm    | 26.16 mm                 | 33.52 mm                 | Brass               | 4.82 mm  | 1/4 in  |
| CBFC 6-4N-BRAS   | 3/8 in<br>9.52 mm  | 16.76 mm    | 55.11 mm    | 47.75 mm    | 29.46 mm                 | 36.83 mm                 | Brass               | 7.11 mm  | 1/4 in  |
| CBFC 8-6N-BRAS   | 1/2 in<br>12.7 mm  | 22.86 mm    | 61.72 mm    | 51.56 mm    | 31.75 mm                 | 41.91 mm                 | Brass               | 10.41 mm | 3/8 in  |
| CBFC 8-8N-BRAS   | 1/2 in<br>12.7 mm  | 22.86 mm    | 66.54 mm    | 56.38 mm    | 31.75 mm                 | 41.91 mm                 | Brass               | 10.41 mm | 1/2 in  |

| Référence        | Tube O.D. (D)      | Dimension A | Dimension L | Dimension I | Dimension I <sub>1</sub> | Dimension L <sub>1</sub> | Material | Min. d   | T (NPT) |
|------------------|--------------------|-------------|-------------|-------------|--------------------------|--------------------------|----------|----------|---------|
| CBFC 12-12N-BRAS | 3/4 in<br>19.05 mm | 24.38 mm    | 73.51 mm    | 63.60 mm    | 38.30 mm                 | 47.21 mm                 | Brass    | 15.74 mm | 3/4 in  |
| CBFC 6M-2N-BRAS  | 6.0 mm             | 15.3 mm     | 46.90 mm    | 39.6 mm     | 27.7 mm                  | 35.00 mm                 | Brass    | 4.8 mm   | 1/8 in  |
| CBFC 6M-4N-BRAS  | 6.0 mm             | 15.3 mm     | 51.8 mm     | 44.4 mm     | 26.2 mm                  | 33.6 mm                  | Brass    | 4.8 mm   | 1/4 in  |
| CBFC 8M-4N-BRAS  | 8.0 mm             | 16.2 mm     | 53.85 mm    | 46.7 mm     | 28.4 mm                  | 35.55 mm                 | Brass    | 6.3 mm   | 1/4 in  |
| CBFC 12M-8N-BRAS | 12.0 mm            | 22.8 mm     | 66.50 mm    | 56.4 mm     | 31.8 mm                  | 41.9 mm                  | Brass    | 9.5 mm   | 1/2 in  |