


Produits > Hydraulique > Raccords > DIN 2353 - 24° > Raccords femelles

Union simple femelle GAS ... R

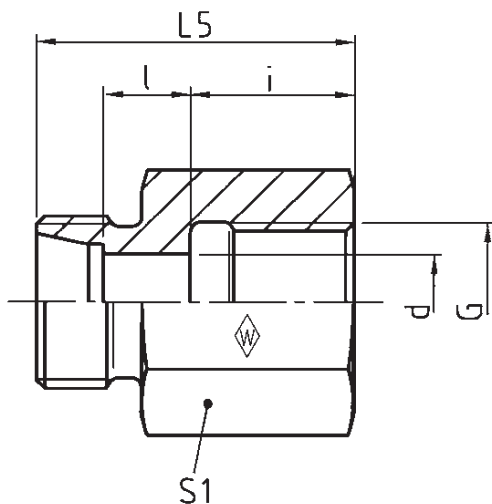

Série	Bar (psi) / acier inox : nous contacter	tube	DIN-ISO G	Désignation	Réf. acier inox : nous contacter	Kg par 100 p.	L2	L5	l	i	d	S1	S2
L	250 (3626)	6	G1/8	GAS6LR	WAL038084	1,9	34	26	7	12	4	14	14
L	250 (3626)	8	G1/4	GAS8LR	WAL038085	3,8	39	31	7	17	6	19	17
L	250 (3626)	10	G1/4	GAS10LR	WAL038086	3,9	40	32	8	17	8	19	19
L	250 (3626)	12	G1/4	GAS12L/R1/4	WAL038087	4,4	40	32	8	17	8	19	22
L	250 (3626)	12	G3/8	GAS12LR	WAL038088	6,2	41	33	9	17	10	24	22
L	250 (3626)	15	G1/2	GAS15LR	WAL038089	8,6	46	38	11	20	12	30	27
L	160 (2321)	18	G1/2	GAS18LR	WAL038090	8,9	47	38	10,5	20	15	27	32
L	160 (2321)	22	G3/4	GAS22LR	WAL038091	8,9	52	43	13,5	22	19	36	36

Série	Bar (psi) / acier inox : nous contacter	tube	DIN-ISO G	Désignation	Réf. acier inox : nous contacter	Kg par 100 p.	L2	L5	I	i	d	S1	S2
L	100 (1450)	28	G1	GAS28LR	WAL038092	20,9	55	45,5	13,5	24,5	24	41	41
L	100 (1450)	35	G11/4	GAS35LR	WAL038093	46,3	63	51,5	14,5	26,5	30	55	50
L	100 (1450)	42	G11/2	GAS42LR	WAL038094	52,8	65	53,5	14	28,5	36	60	60
S	630 (9137)	6	G1/4	GAS6SR	WAL038095	4,2	41	33	9	17	4	19	17
S	630 (9137)	8	G1/4	GAS8SR	WAL038096	4,4	41	33	9	17	5	19	19
S	630 (9137)	10	G3/8	GAS10SR	WAL038097	6,9	43	34	9,5	17	7	24	22
S	630 (9137)	12	G3/8	GAS12SR	WAL038098	7,2	43	34	9,5	17	8	24	24
S	630 (9137)	14	G1/2	GAS14SR	WAL038099	9,7	50	40	12	20	10	27	27
S	400 (5801)	16	G1/2	GAS16SR	WAL038100	9,4	50	40	11,5	20	12	30	30
S	400 (5801)	20	G3/4	GAS20SR	WAL038101	19,3	56	45	12,5	22	16	36	36
S	400 (5801)	25	G1	GAS25SR	WAL038102	24,2	62	49,5	13	24,5	20	41	46
S	250 (3626)	30	G11/4	GAS30SR	WAL038103	50,1	69	55,5	15,5	26,5	25	55	50
S	250 (3626)	38	G11/2	GAS38SR	WAL038104	58,4	74	59,5	15	28,5	32	60	60